


NO-SCRATCH
Premium Floor Polishing System

AKEMI®

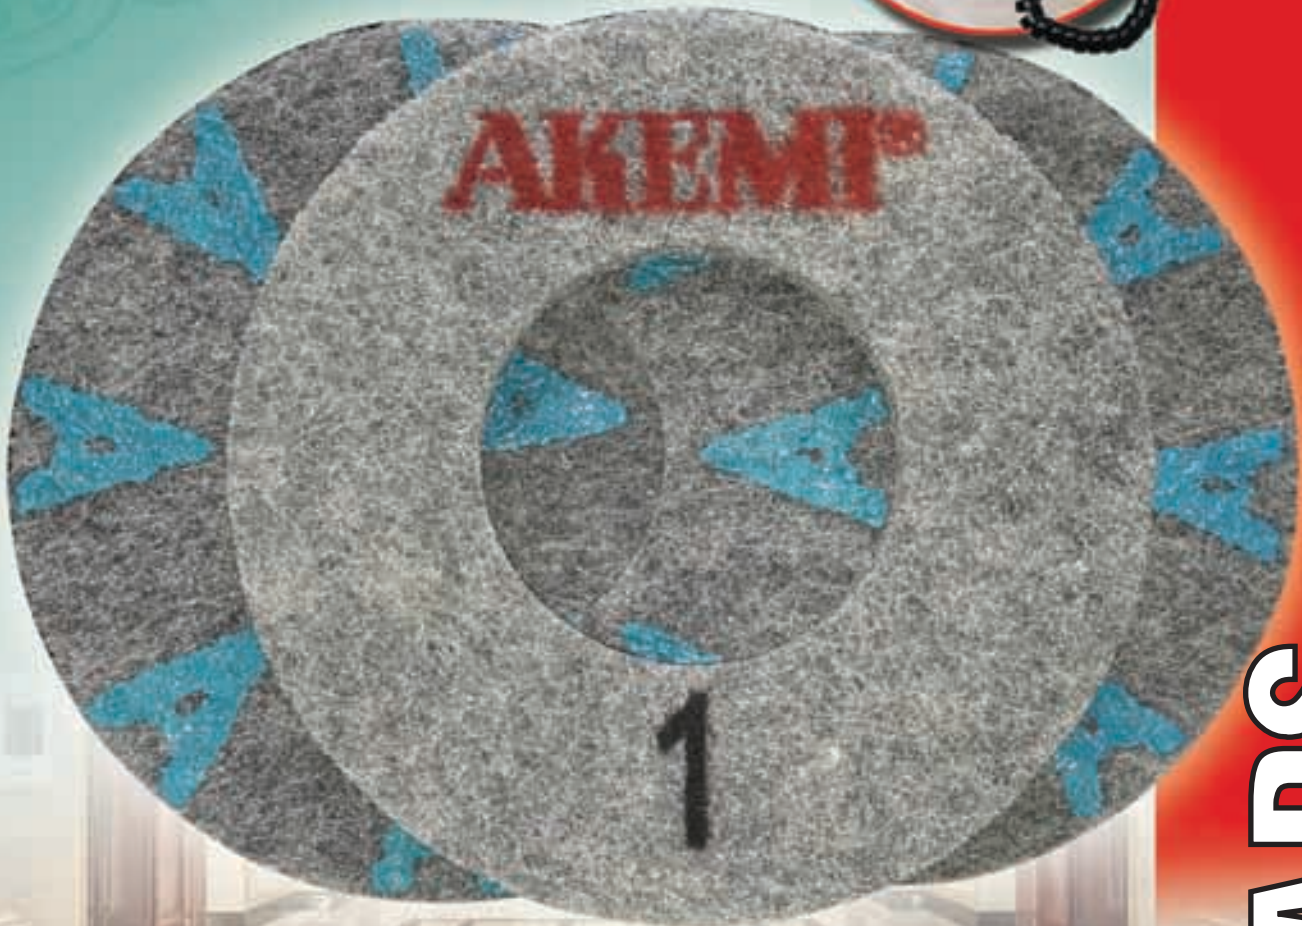

AKE-PADS

AKE PADS- HIGH PERFORMANCE PADS FOR POLISHING & MAINTENANCE OF NATURAL STONE SURFACES

AKEMI® INTRODUCES A REVOLUTIONARY WAY TO POLISH MARBLE FLOORS

PROPERTIES

- ◆ Pads made with a Mix of high quality flexible synthetic fabric & special resin diamond paste.
- ◆ 8 diamond segment placed in a 17inch pads provides closest scratch pattern.
- ◆ High Area performance / Long durability.
- ◆ Uniform Polish with No scratch possibility.
- ◆ Faster system saves time and efforts of machine operator.
- ◆ Back side of the pad can be used for buffing & cleaning of the floor.

ADVANTAGES:

- ✓ No chance of scratch.
- ✓ Faster system Saves Time.
- ✓ Special resin diamonds for higher Gloss.
- ✓ Longer Life.
- ✓ Can be used from both sides.
- ✓ Low load on the machines.

AKE-PADS for Natural Stone Polishing and maintenance.

Machine required: Normal single Disc Machine.

PRODUCT OVERVIEW

Product Name	Description	Coverage	Size
AKE-PAD 1# Grit value 400 Art No	Removes Deep Scratches, first step & after 100 Grit	Approx. 3500-4500 sq ft	17 Inch
AKE-PAD 2# Grit value 800 Art No	Removes Medium Scratches, follow up step after Ake pad 1#. Produces a Silk Matt surface.	Approx. 3500-4500 sq ft	17 Inch
AKE-PAD 3# Grit value 1500 Art No	Removes Small Scratches, Follow up step after Ake pad 2#. Produces a Clear Gloss surface.	Approx. 4000-5000 sq ft	17 Inch
AKE-PAD 4# Grit value 3000 Art No	Very Fine diamonds produces a high Gloss surface. First step in case of floor maintenance.	Approx. 5000-6000 sq ft	17 Inch
AKE-PAD 5# Grit value 5000 Art No	Ultra-Fine diamonds for producing deep gloss with visual wet look effect. Second step in case of floor maintenance.	Approx. 5000-6000 sq ft	17 Inch

Recommended machine: Single Disc machine / Scrubber Drier Machines

Recommended speed: 150 – 500 RPM

Recommended weight: 20 to 80 Kgs

FLOOR MAINTENANCE GUIDE

RECOMMENDED USE:

- Wet on Marble floor.
- Can be used after 100 Grit.
- Start with No 1 pad and go till No 5.
- 4 & 5 number pads can be used for weekly maintenance.

Floor renovation

Deep scratch Start with No 1 & then follow 2, 3, 4 & 5 number pad.

Medium scratch Start with No 2 & then follow 3, 4 & 5 number pad.

Small scratch Start with No 3 & then follow with 4 & 5 number pad.

Field Of Application	AKE-PAD					Nylon Pad/ AKE-PAD Back Side
	1#	2#	3#	4#	5#	
Stone Sil 200 For Surface hardness	■	■				
Stone Sil 800 For Surface Hardness			■			
Akemi Stone Cleaner For maintenance & care	■	■	■	■	■	■
Akemi Liquid Polish For Gloss intensification				■	■	■
Akemi impregnation E.g. Nano , Fluid 10						■

FACTORY:

AKEMI TECHNOLOGY INDIA PVT. LTD.
Plot No. 276, Kachanayakanahalli Sub Layout
Phase-I, Bommasandra Industrial Area
Jigani Hobli, Anekal Taluk
Bangalore - 560105, Karnataka, INDIA
Tel: +91 9243626777
Email: Info@akemiindia.com • www.akemi.in

SILICONE CONCEPTS INTL. PVT. LTD.

A-77, DDA Sheds Okhla Industrial Area
Phase-II, New Delhi - 110020, INDIA
Tel: 011-4052 5858 Fax: 011-2638 8334
Email: subir@siliconeconcepts.com

HEADQUARTER:

AKEMI chemisch technische Spezialfabrik
GmbH Lechstr. 28, D-90451, Numberg,
Germany
www.akemi.de

AKEMI®
*The Original
in stone!*